


Rears **SS304** utility sprayer is the perfect size for your utility truck, ATV, or pick-up truck bed. The tank profile fits beneath the back window of your truck, easily under a canopy, with all system functions accessible from one side of the truck bed: anti-siphon stainless steel fill arm, lid strainer, pressure controls and pressure gauge, engine start and throttle, volume sight gauge, easy clean suction strainer, suction shut-off, and tank drain. Also from this side the operator can isolate and flush the pump system without emptying the spray tank.

Standard tank sizes are 50, 70, and 100 gallon units. Many configurations are available- Rears will deliver a system to match your application.

The tank, frame, tank fittings, mechanical agitation and internal suction assemblies are made with non-porous, heavy gauge stainless steel: from wetttable powders to oil sprays, the tank and plumbing rinse clean to handily move from one job to the next.

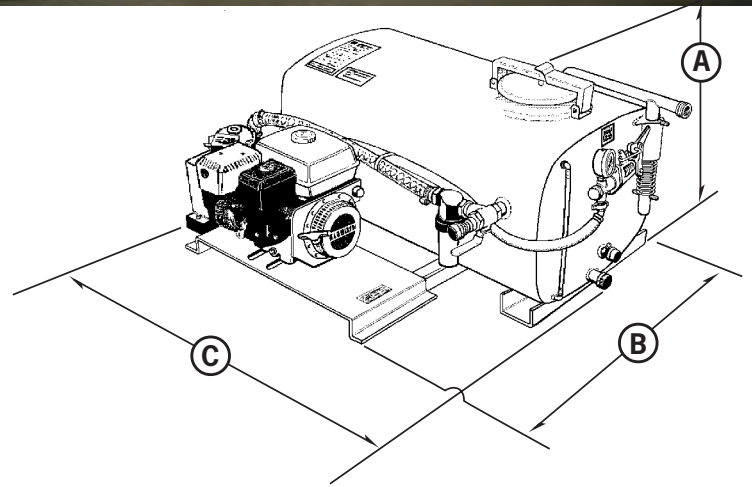

**Rears is a great fit. Our variety of tank profiles and skid designs will accommodate your needs.**



above, left and right: 50 gallon unit with 5.5hp Honda, AR30 (9gpm/550psi) piston actuated diaphragm pump, optional paint, optional jet agitation, Hannay hose reel.

left: 100 gallon unit with DP boom.

<b>TANK</b>	304 stainless steel construction 50-100 gallon units standard, other sizes available flexible tank profile options: specify your bed width mechanical paddle agitation, standard agitator shaft runs the length of the tank lubricated agitator shaft bearings with packing seals jet booster and sparge tube agitation options available tank level sight gauge with safety shutoff
<b>PUMP</b>	AR30/Hypro D30 piston actuated diaphragm pump (9gpm, 550psi max) other diaphragm, piston, and roller pumps available from 4 to 20gpm enamel coated mild steel pump base/frame skid standard stainless steel pump base/frame skid available
<b>PLUMBING</b>	easy clean suction strainer with shutoff valve bypass valve allows low pressure return to tank on engine start-up and aids mixing of tank material
<b>POWER</b>	5.5hp Honda with recoil start, standard, electric start optional other engines available- Honda, Kohler, Briggs Vanguard: 2.5hp - 13hp
<b>RELIEF VALVE</b>	0-550psi adjustable, high cap.(15gpm), replaceable wear components other regulating valves available for higher pressure or volume
<b>PSI GAUGE</b>	standard: 400psi x 2.5" dia. glycerine filled gauge available from 100psi - 1000psi
<b>STRAINER</b>	standard: Spraying Systems #124 x 1" suction line strainer with cutoff valve
<b>TOP LID</b>	11.50" filler opening with fill basket, standard stainless steel lid with over center latch lockable latches and D.O.T. safety lids available
<b>AIR GAP FILLER</b>	.75" air gap filler tube with garden hose inlet, standard
<b>PAINT</b>	frame:   rears orange standard white or green no additional cost special color options available  tank:     stainless finish standard rears orange, white, or green no additional cost special color options available
<b>HOSE REEL</b>	options: Rears and Hannay, manual or electric wind hose guides and rollers also available
<b>HOSE</b>	options: .375" - 1.0", 200 - 800psi Pacific Echo (standard), Kuriyama, Green Garde
<b>ACCESSORIES</b>	a variety of spray guns, booms, root feeders are available Rears, Spraying Systems, Green Garde, Braglia, and more

If you need help with any Rears product, or have an application question, one of our dealers will be happy to help. We have collected a nationwide network of the most helpful and outgoing professionals in the business who want nothing but to help you do your job more easily.

If you don't have a dealer in your area, call our offices in Oregon:

**1 800 547 8925**

