

**Rears Clean Sweep** systems are designed for Orchard, Vineyard and Berry applications. Sweep heads have 2-axis adjustment to accommodate material load, tractor speed, and ground conditions. Select the sweep **head size**, broom **bristle weight**, and **mount style** for your application, below.

Head diameter	Spokes/Brooms	Adjustable broom diameter range	Photos
30"	4	24" - 38"	4,6
48"	6	42" - 60"	1,2,3
72"	12	56" - 76"	5

**Sweep head drive** Hydraulic motor requires 8GPM.  
Manual spool valve or electric/hydraulic control valves


**Sweeper brooms** Light weight bristles **photo 3,6**  
Heavy duty poly-rods **photo 1,2,4,5**

**Single and Dual head units** available for all mount options.

**Mount options** Front mount tool bar **photo 1,2, 6**  
Tractor frame mid-mount **photo 3**  
3-point mount tool bar **photo 4**  
Implement (mower) mount **photo 5**

**Gauge wheel** 360° rotation, heavy duty construction for dependable performance in an abusive environment **photo 1,2,3,5**  
Gauge wheel is optional on 30" DIA/4 spoke sweep head

**Kit options** Hydraulic sweeper head speed control  
Hydraulic vertical swing **photo 1,2,3,5,6**  
Hydraulic horizontal (in-out of the row) swing

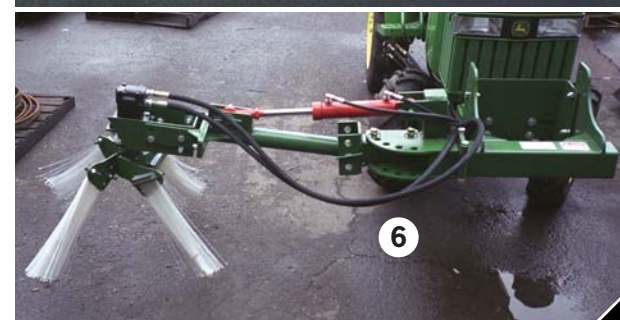

**For more information,  
or the location of your nearest dealer,  
please call 800.547.8925**